

KLT-N8K-S5K3H7 V2.1

Samsung S5K3H7 MIPI串行接口 自动对焦 800万像素 摄像头模组



摄像头模组型号	KLT-N8K-S5K3H7 V2.1
图像感光芯片	S5K3H7
焦距	3.85 mm
光圈	2.2
像素	3264 x 2448
可视角度	72.9°
镜头类型	1/3.2 英寸
镜头尺寸	8.5 x 8.5 x 5.17 mm
模组尺寸	37.40 x 21.25 mm
模组类型	自动对焦
接口	MIPI串行

配对连接器型号: **DF30FC-30DS-0.4V**



主板上的对应连接器。分开售卖。



Top-class sensor for
premium mobile application!

Samsung S5K3H7

High speed and low power 8Mpixel sensor

8Mp 1/3.2" 1.4um BSI Pixel Image Sensor provides;

- Video features of 30fps at full 8Mp for zero shutter lag
- Low power camera solution with optimal design
- Outstanding BSI pixel providing clear and sharp still images in low light, YSNR10 82 Lux

SAMSUNG

Samsung S5K3H7


8Megapixel 1/3.2" 1.4um BSI CMOS Image Sensor

Key Features & Benefits



Target Applications

- Feature phones, Smart phones, Tablet and Digital Still Camera



Key Features

- Low power solution at full 8Mp
- Improved BSI pixel for clear and sharp still image
- On-chip Bad Pixel Correction (BPC)




High Speed Frame Rate

- Full 8Mp 30fps enabling crisp still photos
- Video recording: full HD 30fps, HD 120fps, QVGA 240fps



Product Images

700 Lux

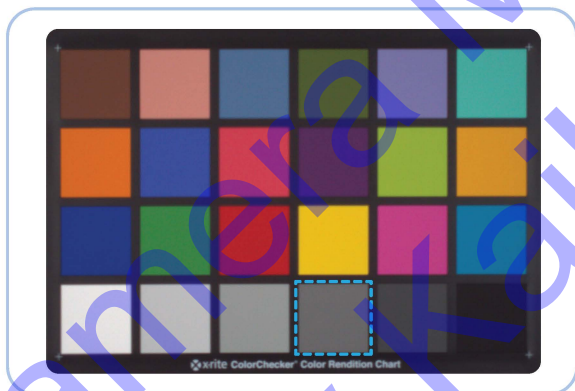

Analog gain x1.6, 30fps
Shutter speed 55.5ms
SNR:38.7dB

50 Lux

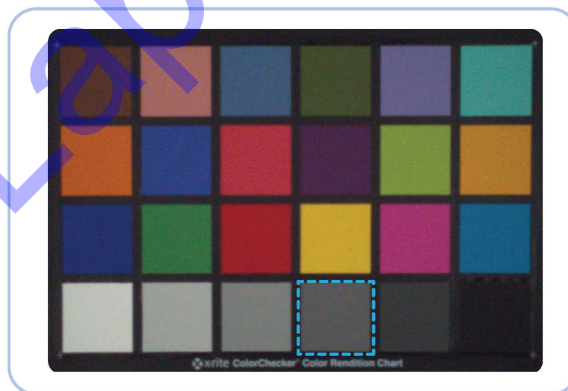

Analog Gain x16, 30fps
Shutter Speed 33ms
SNR:25.69dB

Availability

S5K3H7 is sampling now with volume production for Q1, 2012.

Samsung Electronics Semiconductor Business

San#24 Nongseo-Dong, Kiheung-Gu, Youngin-City, Kyunggi-Do, Korea

For more information, please visit www.samsungsemi.com

The appearance of all products, dates, figures, diagrams and tables are subject to change at anytime without notice

SAMSUNG