

KLT-B3MF-OV2680 V1.1

OmniVision OV2680 MIPI Schnittstelle Fixer Fokus 2MP Kameramodul




Kameramodul Nr.	KLT-B3MF-OV2680 V1.1
Bildsensor	OV2680
EFL	2.32 mm
F.NO	2.2
Pixel	1600 x 1200
Blickwinkel	75.1°
Linsentyp	1/5 Zoll
Objektivabmessungen	6.50 x 6.50 x 4.03 mm
Modulgröße	20.00 x 6.50 mm
Modultyp	Fixer Fokus
Schnittstelle	MIPI
IMT-Objektivmodell	IMT-3A5B004-6

Gegenstecker Teile-Nr. 24-5804-024-000-829



Gegenstecker auf der Hauptplatine. Separat erhältlich.



OV2680/OV2685 2MP product brief



Cost-Effective, Low-Power 2-Megapixel Sensors for Feature Phones, Smartphones and Tablets



available in a lead-free package

The OV2680 (RAW) and OV2685 (SoC) are cost-effective, low-power 2-megapixel CameraChip™ sensors for feature phones and front-facing camera applications in smartphones and tablets. The 1/5-inch sensors leverage a 1.75-micron OmniPixel3-HS™ pixel to deliver high quality 2-megapixel images and video at 30 frames per second (fps). The sensors' high sensitivity and low dark current deliver exceptional image and video quality, even in low-light conditions.

The OV2680 and OV2685 are cost-effective upgrade solutions to the OV2659 & OV2675 CameraChip sensors with a smaller footprint and smaller die size.

Compared to previous generations, the OV2680 and OV2685 offer improved image quality with the latest OmniPixel3-HS pixel architecture. Using OmniVision's proprietary sensor technology, both sensors reduce or eliminate common lighting and electrical sources of image contamination, such as fixed pattern noise, smearing, etc., to produce a clean, stable, color image.

The OV2680 and OV2685 both feature a single-lane MIPI interface, which allows for a simple design with modern basebands.

Find out more at www.ovt.com.


Applications

- Ultrabooks
- Cellular and Picture Phones
- PC Multimedia
- Tablets
- Games
- Toys
- Home Entertainment

Product Features

- MIPI and D-PHY specification (contains one clock lane) with a maximum of 750 Mbps data transfer rate
- high sensitivity and low dark current for low-light conditions
- support for output formats:
 - OV2680: 10-bit RAW RGB
 - OV2685: 10-bit RAW RGB, 8-bit YUV
- supports free-running clock and gated clock
- programmable controls for frame rate, mirror and flip, cropping, and windowing
- supports down-sampling and binning mode
- low operating voltage and low power consumption for embedded portable applications
- auto black level calibration
- supports global analog gain
- defect correction capability
- supports horizontal and vertical subsampling

OV2680/OV2685




Ordering Information

- OV02680-H47A (color, lead-free, 47-pin CSP5)
- OV02685-H53A (color, lead-free, 53-pin CSP5)

Product Specifications

- active array size: 1616 x 1216
- lens size: 1/5"
- power supply:
 - OV2680 core: 1.58V ±3%
 - OV2685 core: 1.7 - 1.9V
 - analog: 2.6 - 3.0V
 - I/O: 1.7 - 3.0V
- lens chief ray angle: 28.5° non-linear
- input clock frequency: 6 - 27 MHz
- maximum image transfer rate: 30 fps
- power requirements:
 - OV2680 active: 123 mW
 - OV2685 active: 259 mW
 - XSHUTDN: <1 µA
- scan mode: progressive
- maximum exposure interval: 1 frame - 4 t_{row}
- temperature range:
 - operating: -30°C to +85°C junction temperature
 - stable image: 0°C to +50°C junction temperature
- pixel size: 1.75 µm x 1.75 µm
- image area: 2840 µm x 2150 µm
- package/die dimensions:
 - OV2680 CSP5: 4180 µm x 3480 µm
 - OV2685 CSP5: 4454 µm x 4014 µm
- output formats: 10-bit RGB RAW, 8-bit YUV (OV2685)

Functional Block Diagram

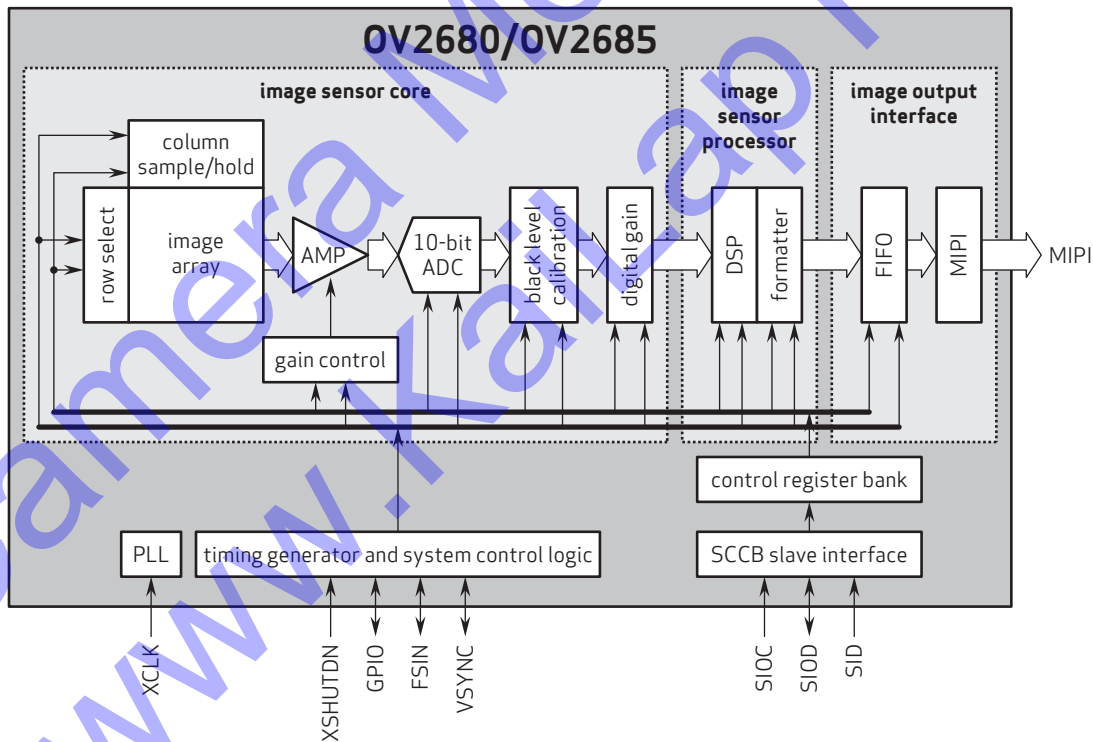

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: + 1 408 567 3000
Fax: + 1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision and VarioPixel are registered trademarks of OmniVision Technologies, Inc. The OmniVision logo and OmniPixel3-H5 are trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.

OmniVision