


## KLT-J5MF-IMX335 V1.0

**5MP Sony IMX335 MIPI-Schnittstelle M12 Fester Fokus Kameramodul**



Vorderansicht

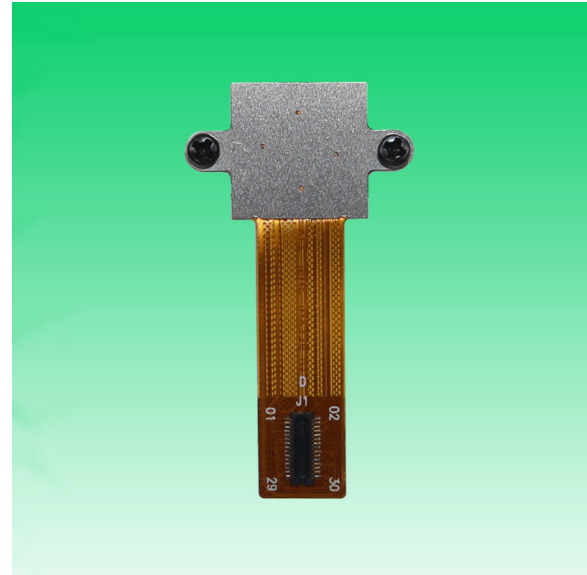

Rückansicht

### Spezifikationen

|                          |                                       |
|--------------------------|---------------------------------------|
| Kameramodul Nr.          | KLT-J5MF-IMX335 V1.0                  |
| Auflösung                | 5MP                                   |
| Bildsensor               | IMX335                                |
| Sensorart                | 1/2.8"                                |
| Pixel Größe              | 2.0 um x 2.0 um                       |
| EFL                      | 3.07 mm                               |
| F.NO                     | 1.80                                  |
| Pixel                    | 2592 x 1944                           |
| Betrachtungswinkel       | 152.3°(DFOV) 124.2°(HFOV) 64.2°(VFOV) |
| Linsenabmessungen        | 13.00 x 13.00 x 18.07 mm              |
| Modulgröße               | 40.00 x 21.90 mm                      |
| Modultyp                 | Fester Fokus                          |
| Schnittstelle            | MIPI                                  |
| Autofokus-VCM-Treiber-IC | Keiner                                |
| Linsenmodell             | KLT-LENS-YM6020P                      |
| Linsentyp                | 650 nm IR-Schnitt                     |
| Betriebstemperatur       | -20°C to +85°C                        |
| Gegenstecker             | DF30FC-30DS-0.4V                      |

**KLT-J5MF-IMX335 V1.0****5MP Sony IMX335 MIPI-Schnittstelle M12 Fester Fokus Kameramodul**

Ansicht von oben



Seitenansicht




Untersicht



Gegenstecker

| Version Mark |    | Information   |  | Date       |
|--------------|----|---------------|--|------------|
| V1.0         | PD | First Version |  | 2018-05-04 |

| RoHS |           |
|------|-----------|
| PIN  | SIGNAL    |
| 1    | GND       |
| 2    | SLAMODE   |
| 3    | DVDD1.2V  |
| 4    | DOVDD1.8V |
| 5    | XHS       |
| 6    | XVS       |
| 7    | AVDD2.9V  |
| 8    | DGND      |
| 9    | SDA       |
| 10   | SCL       |
| 11   | DGND      |
| 12   | XCLR      |
| 13   | DGND      |
| 14   | MCLK      |
| 15   | DGND      |
| 16   | DMOP4     |
| 17   | DMOM4     |
| 18   | DGND      |
| 19   | DMOP3     |
| 20   | DMOM3     |
| 21   | DGND      |
| 22   | DMOP2     |
| 23   | DMOM2     |
| 24   | DGND      |
| 25   | DMCKP     |
| 26   | DMCKM     |
| 27   | DGND      |
| 28   | DMOP1     |
| 29   | DMOM1     |
| 30   | DGND      |

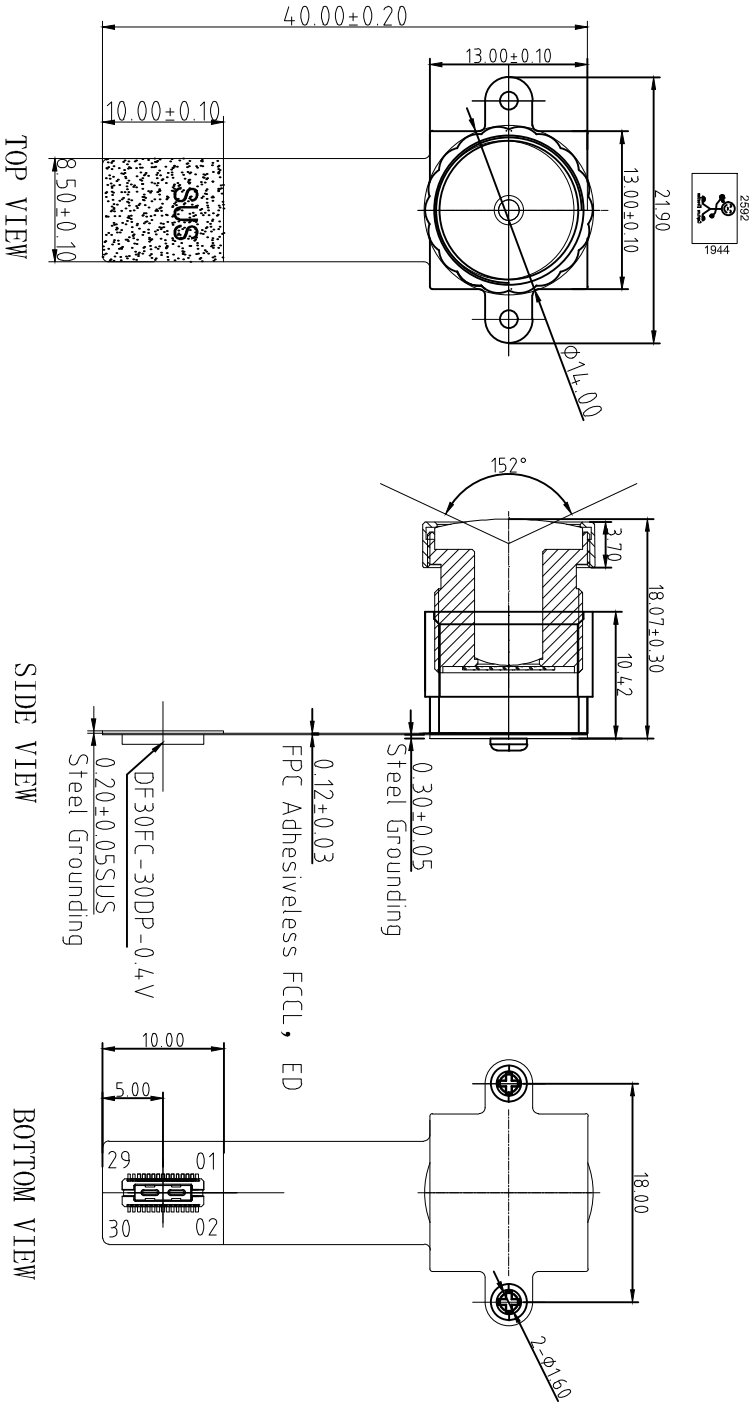

## Parameters:

### 1、Sensor specification:

Image Sensor: IMX335LQAN-C  
Pixel:  $2\mu\text{m} \times 2\mu\text{m}$   
Lens Type: 1/2.8  
Important Voltage Description: DVDD1.2V  
(external power supply);

### 2、Lens specification:

FOV:  $152^\circ$   
F/NO.: 1.8  
TV distortion:  $\leq -27\%$   
Focal length:  $3.07\text{mm}$   
Composition: 6G+IR FILTER  
IR Cut Coating:  $650\text{nm} \pm 10\text{nm} @ 50\%$

Kai Lap Technologies Group Ltd

|             |           |                  |                      |           |
|-------------|-----------|------------------|----------------------|-----------|
| Designed By | Kevin     | Model Name:      | KLT-J5MF-IMX335 V1.0 |           |
| Checked By  | Aouly Yan | Projection Type: | Third Angle          |           |
|             |           | Unit:            | mm                   | Material: |
|             |           | Scale:           | 1:1                  | Sheet:    |
|             |           | Version:         |                      | 1/0       |

Lens Model: KLT-LENS-YM6020P

| NO. | ITEM                                  | SPECIFICATION          |
|-----|---------------------------------------|------------------------|
| 1   | 焦距 (F.F.)                             | 3.07                   |
| 2   | 光学后焦 (B.F.)                           | 5.42                   |
| 3   | 机械后焦 (M.F.)                           | 4.83                   |
| 4   | 机械总长 (T.L.)                           | 17.25                  |
| 5   | 光圈 (F/No.)                            | 1.8                    |
| 6   | 最大像面 (Max Image Circle)               | Φ6.9                   |
| 7   | 光学结构 (Structure)                      | 6G+1R                  |
| 8   | 螺纹规格 (Thread)                         | M1.2*0.5               |
| 9   | 光谱透射率 (Spectral Transmission)         | Tavg>90%               |
| 10  | 视场角 (FCV)                             | Horizontal             |
|     |                                       | Vertical               |
|     |                                       | Diagonal               |
|     |                                       | Relative (Relative II) |
| 11  | 畸变 (TV Distortion)                    | -0.24%                 |
| 12  | 相对照度 (Relative II)                    | 58.40%                 |
| 13  | 主光轴角度 (CRA)                           | 11.39°                 |
| 14  | R-RTES SPEC. (Built-in Camera Module) |                        |
|     | Tavg>=85%                             | ④ 440-650nm            |
|     | T=50%                                 | ④ 648±10nm             |
|     | Tavg<=3%                              | ④ 700-1000nm           |
|     | T<5%                                  | ④ 1050nm               |

|    |    |              |       |    |       |
|----|----|--------------|-------|----|-------|
| 设计 | 处数 | 分区           | 更改文件号 | 签名 | 年、月、日 |
| 审核 |    | 20151213 标准化 |       |    |       |
| 工艺 |    |              | 批准    |    |       |


|   |   |   |   |    |     |
|---|---|---|---|----|-----|
| 共 | 张 | 第 | 张 | 比例 | 4:1 |
|---|---|---|---|----|-----|

# 0.4 mm Pitch, 0.9 mm Height, Board-to-Board / Board-to-FPC Connectors

## DF30 Series



### Extremely small size

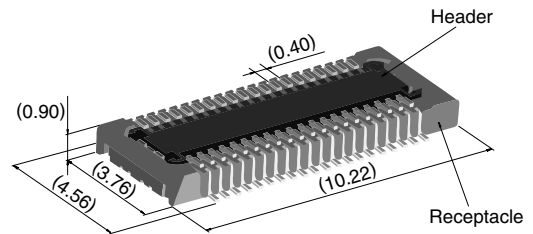

40 positions shown

### Overview

Continuous miniaturization and increased component density on PCB created demand for extremely low profile connectors. This series is addition of a new extremely low profile connectors to Hirose's wide range of high reliability board-to-board/board-to-FPC connection solutions.

### Features

#### 1. Contact reliability

Concentration of the contact's normal forces at the single point assures good contact wipe and electrical reliability, while confirming the fully mated condition with a definite tactile click.

#### 2. Self alignment

Recognizing the difficulties of mating extremely small connectors in limited spaces the connectors will self align in horizontal axis within 0.3 mm.

#### 3. Automatic board placement

Packaged on tape-and-reel the plug and headers have sufficiently large flat areas to allow pick-up with vacuum nozzles of automatic placement equipment.

#### 4. Variety of contact positions and styles

Available in standard contact positions of: 20, 22, 24, 30, 34, 40, 50, 60, 70 and 80 with and without metal fittings. Addition of metal fittings does not affect external dimensions of the connectors.

Smaller contact positions are also available.

#### 5. Support for continuity test connector

Connectors which have increased insertion and removal durability are available for continuity tests. Contact your Hirose sales representative for details.


### Applications

Cellular phones, PDA's, mobile computers, digital cameras, digital video cameras, and other devices demanding high reliability connections in extremely limited spaces.


### Low profile

### Increased mated retention

### High contact reliability

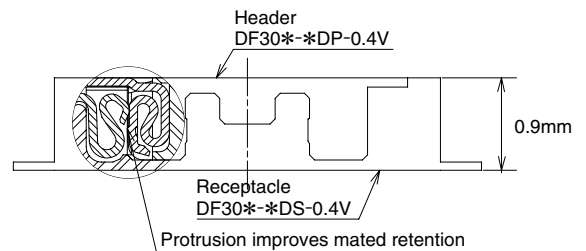

### Self alignment

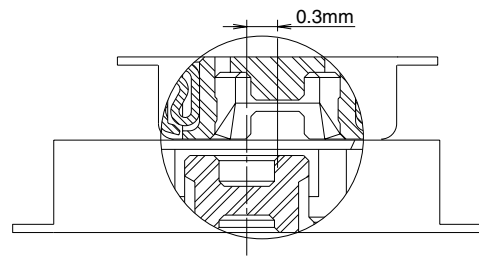

## ■Product Specifications

|        |                                            |                                                                                                               |                                                                                                                |
|--------|--------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Rating | Rated current 0.3A<br>Rated voltage 30V AC | Operating temperature range : -35℃ to 85℃ (Note 1)<br>Operating humidity range : Relative humidity 20% to 80% | Storage temperature range -10℃ to 60℃ (Note 2)<br>Storage humidity range Relative humidity 40% to 70% (Note 2) |
|--------|--------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|

| Item                                      | Specification                                                        | Conditions                                                                                   |
|-------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| 1. Insulation resistance                  | 50 MΩ min.                                                           | 100V DC                                                                                      |
| 2. Withstanding voltage                   | No flashover or insulation breakdown.                                | 100V AC / one minute                                                                         |
| 3. Contact resistance                     | 100 mΩ max.                                                          | 100 mA                                                                                       |
| 4. Vibration                              | No electrical discontinuity of 1 μs or more                          | Frequency: 10 to 55 Hz, single amplitude of 0.75mm, 2 hours, 3 axis                          |
| 5. Humidity                               | Contact resistance: 100 mΩ max.<br>Insulation resistance: 25 MΩ min. | 96 hours at temperature of 40℃±2℃ and RH of 90% to 95%                                       |
| 6. Temperature cycle                      | Contact resistance: 100 mΩ max.<br>Insulation resistance: 50 MΩ min. | Temperature: -55℃→+5℃ to +35℃→+85℃→+5℃ to +35℃<br>Duration: 30→10→30→10(Minutes)<br>5 cycles |
| 7. Durability<br>(insertions/withdrawals) | Contact resistance: 100 mΩ max.                                      | 50 cycles(Connector for conductivity tests: 500 cycles)                                      |
| 8. Resistance to soldering heat           | No deformation of components affecting performance.                  | Reflow: At the recommended temperature profile<br>Manual soldering: 300℃ for 3 seconds       |

Note 1: Includes temperature rise caused by current flow.

Note 2: The term "storage" refers to products stored for long period of time prior to mounting and use. Operating temperature range and humidity range covers non-conducting condition of installed connectors in storage, shipment or during transportation.

## ■Materials and Finishes

| Connectors              | Component      | Material        | Finish            | Remarks |
|-------------------------|----------------|-----------------|-------------------|---------|
| Receptacles and Headers | Insulator      | LCP             | Color : Black     | UL94V-0 |
|                         | Contacts       | Phosphor bronze | Gold plated       | ————    |
|                         | Metal fittings | Phosphor bronze | Tin-copper plated | ————    |



## ■Ordering information

### ●Receptacles and Headers


DF30   FC -   \*   DS - 0.4   V   (\*\*)  
           ①       ②       ③       ④       ⑤       ⑥       ⑦

|                                                                                                                                                  |                                                                                                                               |
|--------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| ① Series name: DF30                                                                                                                              | ⑤ Contact pitch: 0.4 mm                                                                                                       |
| ② Configuration<br>FB: With metal fittings, without bosses<br>FC: Without metal fittings, without bosses<br>CJ: Connector for conductivity tests | ⑥ Termination section<br>V: Straight SMT                                                                                      |
| ③ Number of positions: 20, 22, 24, 30, 34, 40, 50, 60, 70, 80                                                                                    | ⑦ Packaging<br>(81): Embossed tape packaging (5,000 pieces per reel)<br>(82): Embossed tape packaging (1,000 pieces per reel) |
| ④ Connector type<br>DS: Double row receptacle<br>DP: Double row header                                                                           |                                                                                                                               |

## ■Receptacles (without metal fittings)

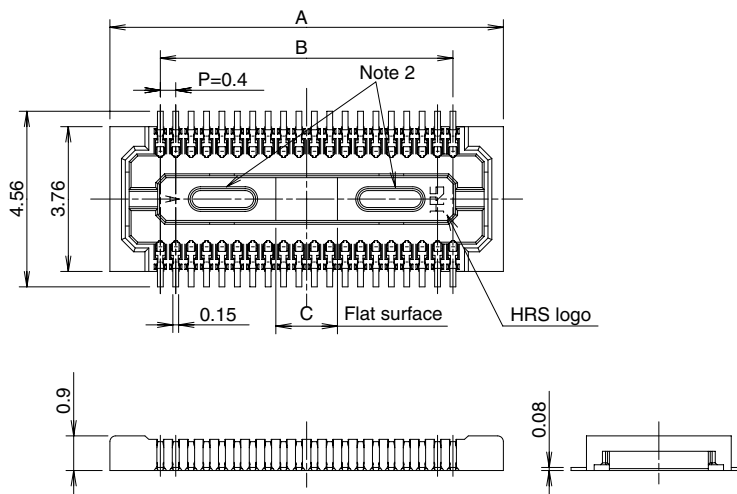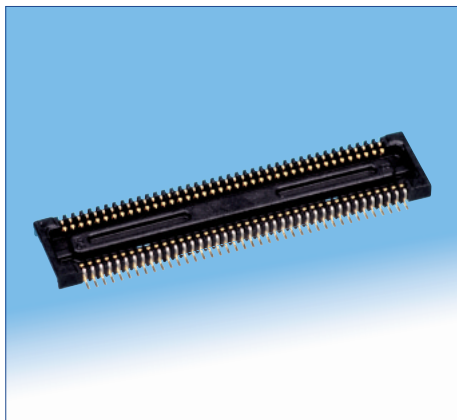

## ◆Recommended PCB mounting pattern

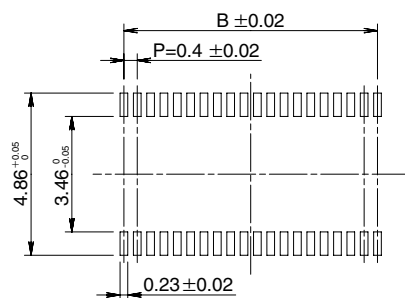

Recommended solder paste thickness: 120  $\mu$ m

[Specification number] -\*\*, (\*\*)

(81): Embossed tape packaging (5,000 pieces per reel)

\* Tolerances non- accumulative.

Unit: mm

| Part Number          | CL No.           | Number of contacts | A     | B    | C    |
|----------------------|------------------|--------------------|-------|------|------|
| DF30FC-20DS-0.4V(**) | CL684-1109-8-**- | 20                 | 6.22  | 3.6  | 1.2  |
| DF30FC-22DS-0.4V(**) | CL684-1110-7-**- | 22                 | 6.62  | 4.0  | 1.2  |
| DF30FC-24DS-0.4V(**) | CL684-1111-0-**- | 24                 | 7.02  | 4.4  | 1.2  |
| DF30FC-30DS-0.4V(**) | CL684-1112-2-**- | 30                 | 8.22  | 5.6  | 1.2  |
| DF30FC-34DS-0.4V(**) | CL684-1113-5-**- | 34                 | 9.02  | 6.4  | 1.36 |
| DF30FC-40DS-0.4V(**) | CL684-1078-6-**- | 40                 | 10.22 | 7.6  | 1.6  |
| DF30FC-50DS-0.4V(**) | CL684-1114-8-**- | 50                 | 12.22 | 9.6  | 2.0  |
| DF30FC-60DS-0.4V(**) | CL684-1082-3-**- | 60                 | 14.22 | 11.6 | 2.4  |
| DF30FC-70DS-0.4V(**) | CL684-1115-0-**- | 70                 | 16.22 | 13.6 | 2.8  |
| DF30FC-80DS-0.4V(**) | CL684-1116-3-**- | 80                 | 18.22 | 15.6 | 3.2  |

Note 1: Order by number of reels.

Note 2: Receptacles with 24 or fewer contacts positions will not have recessed areas.

## [Product Information]

Ver.1.0

# IMX335LLN

Diagonal 6.52 mm (Type 1 / 2.8) CMOS Solid-state Image Sensor with Square Pixel for Monochrome Cameras

### Description

The IMX335LLN is a diagonal 6.52 mm (Type 1 / 2.8) CMOS active pixel type solid-state image sensor with a square pixel array and 5.14 M effective pixels. This chip operates with analog 2.9 V, digital 1.2 V, and interface 1.8 V triple power supply, and has low power consumption. High sensitivity, low dark current and no smear are achieved. This chip features an electronic shutter with variable charge-integration time.

(Applications: Surveillance cameras, FA cameras, Industrial cameras)

### Features

- ◆ CMOS active pixel type dots
- ◆ Built-in timing adjustment circuit, H/V driver and serial communication circuit
- ◆ Input frequency: 6 to 27 MHz / 37.125 MHz / 74.25 MHz
- ◆ Number of recommended recording pixels: 2592 (H) × 1944 (V) approx. 5.04 M pixels
- ◆ Readout mode
  - All-pixel scan mode
  - Window cropping mode
  - Vertical / Horizontal direction-normal / inverted readout mode
- ◆ Readout rate
  - Maximum frame rate in All-pixel scan mode 2592(H) × 1944(V) A/D 10-bit : 60 frame/s
- ◆ High dynamic range (HDR) function
  - Multiple exposure HDR
  - Digital overlap HDR
- ◆ Variable-speed shutter function (resolution 1H units)
- ◆ 10-bit / 12-bit A/D converter
- ◆ CDS / PGA function
  - 0 dB to 30 dB : Analog Gain 30 dB (step pitch 0.3 dB)
  - 30.3 dB to 72 dB : Analog Gain 30 dB + Digital Gain 0.3 to 42 dB (step pitch 0.3 dB)
- ◆ Supports I/O
  - CSI-2 serial data output ( 2 Lane / 4 Lane, RAW10 / RAW12 output)
- ◆ Recommended exit pupil distance: -100 mm to  $-\infty$

### STARVIS

\* STARVIS is a trademark of Sony Corporation. The STARVIS is back-illuminated pixel technology used in CMOS image sensors for surveillance camera applications. It features a sensitivity of 2000 mV or more per  $1 \mu\text{m}^2$  (color product, when imaging with a 706 cd/m<sup>2</sup> light source, F5.6 in 1 s accumulation equivalent), and realizes high picture quality in the visible-light and near infrared light regions.

Sony reserves the right to change products and specifications without prior notice.

Sony logo is a registered trademark of Sony Corporation.

## Device Structure

|                                          |                                                                                                                |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| ◆ CMOS image sensor                      |                                                                                                                |
| ◆ Image size                             | Type 1/2.8                                                                                                     |
| ◆ Total number of pixels                 | 2704 (H) × 2104 (V) approx. 5.69 M pixels                                                                      |
| ◆ Number of effective pixels             | 2616 (H) × 1964 (V) approx. 5.14 M pixels                                                                      |
| ◆ Number of active pixels                | 2616 (H) × 1960 (V) approx. 5.13 M pixels                                                                      |
| ◆ Number of recommended recording pixels | 2592 (H) × 1944 (V) approx. 5.04 M pixels                                                                      |
| ◆ Unit cell size                         | 2.0 μm (H) × 2.0 μm (V)                                                                                        |
| ◆ Optical black                          | Horizontal (H) direction: Front 0 pixel, rear 0 pixel<br>Vertical (V) direction: Front 13 pixels, rear 0 pixel |
| ◆ Dummy                                  | Horizontal (H) direction: Front 0 pixel, rear 0 pixel<br>Vertical (V) direction: Front 0 pixel, rear 0 pixel   |
| ◆ Package                                | 88 pin BGA                                                                                                     |

## Image Sensor Characteristics

(T<sub>j</sub> = 60 °C)

| Item              |      | Value      | Remarks                                       |
|-------------------|------|------------|-----------------------------------------------|
| Sensitivity (F8)  | Typ. | 1961 Digit | 1/30 s accumulation<br>12 bit converted value |
| Saturation signal | Min. | 3895 Digit | 12 bit converted value                        |

## Basic Drive Mode

| Drive mode | Recommended number of recording pixels       | Maximum frame rate [frame/s] | Output interface | ADC [bit] |
|------------|----------------------------------------------|------------------------------|------------------|-----------|
| All pixel  | 2592 (H) × 1944 (V)<br>approx. 5.04 M pixels | 60                           | CSI-2            | 10        |

## [Product Information]

Ver.1.1

# IMX335LQN

Diagonal 6.52 mm (Type 1/2.8) CMOS Solid-state Image Sensor with Square Pixel for Color Cameras

### Description

The IMX335LQN is a diagonal 6.52 mm (Type 1/2.8) CMOS active pixel type solid-state image sensor with a square pixel array and 5.14 M effective pixels. This chip operates with analog 2.9 V, digital 1.2 V, and interface 1.8 V triple power supply, and has low power consumption. High sensitivity, low dark current and no smear are achieved through the adoption of R, G and B primary color mosaic filters. This chip features an electronic shutter with variable charge-integration time.

(Applications: Surveillance cameras, FA cameras, Industrial cameras)

### Features

- ◆ CMOS active pixel type dots
- ◆ Built-in timing adjustment circuit, H/V driver and serial communication circuit
- ◆ Input frequency: 6 to 27 MHz / 37.125 MHz / 74.25 MHz
- ◆ Number of recommended recording pixels: 2592 (H) × 1944 (V) approx. 5.04 M pixels
- ◆ Readout mode
  - All-pixel scan mode
  - Horizontal/Vertical 2/2-line binning mode
  - Window cropping mode
  - Vertical / Horizontal direction-normal / inverted readout mode
- ◆ Readout rate
  - Maximum frame rate in All-pixel scan mode 2592 (H) × 1944 (V) A/D 10-bit : 60 frame/s
- ◆ High dynamic range (HDR) function
  - Multiple exposure HDR
  - Digital overlap HDR
- ◆ Variable-speed shutter function (resolution 1H units)
- ◆ 10-bit / 12-bit A/D converter
- ◆ CDS / PGA function
  - 0 dB to 30 dB : Analog Gain 30 dB (step pitch 0.3 dB)
  - 30.3 dB to 72 dB : Analog Gain 30 dB + Digital Gain 0.3 to 42 dB (step pitch 0.3 dB)
- ◆ Supports I/O
  - CSI-2 serial data output ( 2 Lane / 4 Lane, RAW10 / RAW12 output)
- ◆ Recommended exit pupil distance: -30 mm to  $-\infty$

### STARVIS

\* STARVIS is a trademark of Sony Corporation. The STARVIS is back-illuminated pixel technology used in CMOS image sensors for surveillance camera applications. It features a sensitivity of 2000 mV or more per  $1 \mu\text{m}^2$  (color product, when imaging with a 706 cd/m<sup>2</sup> light source, F5.6 in 1 s accumulation equivalent), and realizes high picture quality in the visible-light and near infrared light regions.

Sony reserves the right to change products and specifications without prior notice.

Sony logo is a registered trademark of Sony Corporation.

## Device Structure

|                                          |                                                                                                                |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| ◆ CMOS image sensor                      |                                                                                                                |
| ◆ Image size                             | Type 1/2.8                                                                                                     |
| ◆ Total number of pixels                 | 2704 (H) × 2104 (V) approx. 5.69 M pixels                                                                      |
| ◆ Number of effective pixels             | 2616 (H) × 1964 (V) approx. 5.14 M pixels                                                                      |
| ◆ Number of active pixels                | 2616 (H) × 1960 (V) approx. 5.11 M pixels                                                                      |
| ◆ Number of recommended recording pixels | 2592 (H) × 1944 (V) approx. 5.04 M pixels                                                                      |
| ◆ Unit cell size                         | 2.0 μm (H) × 2.0 μm (V)                                                                                        |
| ◆ Optical black                          | Horizontal (H) direction: Front 0 pixel, rear 0 pixel<br>Vertical (V) direction: Front 13 pixels, rear 0 pixel |
| ◆ Dummy                                  | Horizontal (H) direction: Front 0 pixel, rear 0 pixel<br>Vertical (V) direction: Front 0 pixel, rear 0 pixel   |
| ◆ Package                                | 88 pin CSP BGA                                                                                                 |

## Image Sensor Characteristics

(T<sub>j</sub> = 60 °C)

| Item               |      | Value      | Remarks                                       |
|--------------------|------|------------|-----------------------------------------------|
| Sensitivity (F5.6) | Typ. | 2200 Digit | 1/30 s accumulation<br>12 bit converted value |
| Saturation signal  | Min. | 3895 Digit | 12 bit converted value                        |

## Basic Drive Mode

| Drive mode                                  | Recommended number of recording pixels       | Maximum frame rate [frame/s] | Output interface | ADC [bit] |
|---------------------------------------------|----------------------------------------------|------------------------------|------------------|-----------|
| All pixel                                   | 2592 (H) × 1944 (V)<br>approx. 5.04 M pixels | 60                           | CSI-2            | 10        |
| Horizontal/<br>Vertical 2/2-line<br>binning | 1296 (H) × 972 (V)<br>approx. 1.26 M pixels  | 60                           | CSI-2            | 10        |

## Referenztabelle für die Pinbelegungsdefinition des Kameramoduls

| OmniVision Sony Himax Samsung On-Semi Aptina Himax GalaxyCore PixArt Bildsensoren |                                                          |
|-----------------------------------------------------------------------------------|----------------------------------------------------------|
| Pin Signal                                                                        | Beschreibung                                             |
| DGND GND                                                                          | Masse für digitale Schaltung                             |
| AGND                                                                              | Masse für analoge Schaltung                              |
| PCLK DCK                                                                          | DVP-PCLK-Ausgang                                         |
| XCLR PWDN XSHUTDOWN STANDBY                                                       | Abschalten aktiv hoch mit internem Pulldown-Widerstand   |
| MCLK XVCLK XCLK INCK                                                              | Systemeingangsuhr                                        |
| RESET RST                                                                         | Aktiv Low mit internem Pull-up-Widerstand zurücksetzen   |
| NC NULL                                                                           | keine Verbindung                                         |
| SDA SIO_D SIOD                                                                    | SCCB-Daten                                               |
| SCL SIO_C SOIC                                                                    | SCCB-Eingangstakt                                        |
| VSYNCS XVS FSYNCS                                                                 | DVP-VSYNCS-Ausgang                                       |
| HREF XHS                                                                          | DVP-HREF-Ausgang                                         |
| DOVDD                                                                             | Strom für E/A-Schaltung                                  |
| AFVDD                                                                             | Strom für VCM-Schaltung                                  |
| AVDD                                                                              | Strom für analoge Schaltung                              |
| DVDD                                                                              | Strom für digitale Schaltung                             |
| STROBE FSTROBE                                                                    | Strobe-Ausgang                                           |
| FSIN                                                                              | Synchronisieren Sie das VSYNCS-Signal vom anderen Sensor |
| SID                                                                               | SCCB letzte Bit-ID-Eingabe                               |
| ILPWM                                                                             | mechanische Shutter-Ausgangsanzeige                      |
| FREX                                                                              | Rahmenbelichtung / mechanischer Verschluss               |
| GPIO                                                                              | Allzweckeingänge                                         |
| SLASEL                                                                            | I2C-Slave-Adresse auswählen                              |
| AFEN                                                                              | CEN-Chip aktivieren aktiv hoch auf VCM-Treiber-IC        |
| <b>MIPI Schnittstelle</b>                                                         |                                                          |
| MDN0 DN0 MD0N DATA_N DMO1N                                                        | MIPI 1st negative Ausgabe der Datenspur                  |
| MDP0 DP0 MD0P DATA_P DMO1P                                                        | MIPI 1st positiver Ausgang der Datenspur                 |
| MDN1 DN1 MD1N DATA2_N DMO2N                                                       | MIPI 2nd negative Ausgabe der Datenspur                  |
| MDP1 DP1 MD1P DATA2_P DMO2P                                                       | MIPI 2nd positiver Ausgang der Datenspur                 |
| MDN2 DN2 MD2N DATA3_N DMO3N                                                       | MIPI 3rd negative Ausgabe der Datenspur                  |
| MDP2 DP2 MD2P DATA3_P DMO3P                                                       | MIPI 3rd positiver Ausgang der Datenspur                 |
| MDN3 DN3 MD3N DATA4_N DMO4N                                                       | MIPI 4th negative Ausgabe der Datenspur                  |
| MDP3 DP3 MD3P DATA4_P DMO4P                                                       | MIPI 4th positiver Ausgang der Datenspur                 |
| MCN CLKN CLK_N DCKN                                                               | MIPI Uhr negativer Ausgang                               |
| MCP CLKP MCP CLK_P DCKN                                                           | MIPI Takt positiver Ausgang                              |
| <b>DVP Parallel Schnittstelle</b>                                                 |                                                          |
| D0 DO0 Y0                                                                         | DVP Datenausgabeport 0                                   |
| D1 DO1 Y1                                                                         | DVP Datenausgabeport 1                                   |
| D2 DO2 Y2                                                                         | DVP Datenausgabeport 2                                   |
| D3 DO3 Y3                                                                         | DVP Datenausgabeport 3                                   |
| D4 DO4 Y4                                                                         | DVP Datenausgabeport 4                                   |
| D5 DO5 Y5                                                                         | DVP Datenausgabeport 5                                   |
| D6 DO6 Y6                                                                         | DVP Datenausgabeport 6                                   |
| D7 DO7 Y7                                                                         | DVP Datenausgabeport 7                                   |
| D8 DO8 Y8                                                                         | DVP Datenausgabeport 8                                   |
| D9 DO9 Y9                                                                         | DVP Datenausgabeport 9                                   |
| D10 DO10 Y10                                                                      | DVP Datenausgabeport 10                                  |
| D11 DO11 Y11                                                                      | DVP Datenausgabeport 11                                  |

Kameraanwendungen

*your BEST camera module partner*



## IMAGING DEVICES



## Kamera-Zuverlässigkeitstest


| Reliability Inspection Item |                                       |                                                                     | Testmethode               | Akzeptanzkriterium        |
|-----------------------------|---------------------------------------|---------------------------------------------------------------------|---------------------------|---------------------------|
| Kategorie                   |                                       | Artikel                                                             |                           |                           |
| Umwelt                      | Lager Temperatur                      | Hoch 60°C 96 Std                                                    | Temperaturkammer          | Keine anormale Situation  |
|                             |                                       | Niedrig -20°C 96 Std                                                | Temperaturkammer          | Keine anormale Situation  |
|                             | Betriebs Temperatur                   | Hoch 60°C 24 Std                                                    | Temperaturkammer          | Keine anormale Situation  |
|                             |                                       | Niedrig -20°C 24 Std                                                | Temperaturkammer          | Keine anormale Situation  |
|                             | Feuchtigkeit                          | 60°C 80% 24 Std                                                     | Temperaturkammer          | Keine anormale Situation  |
|                             | Thermischer Schock                    | Hoch 60°C 0.5 Std<br>Niedrig -20°C 0.5 Std<br>Radfahren rein 24 Std | Temperaturkammer          | Keine anormale Situation  |
| Physisch                    | Falltest<br>(Im freien Fall)          | Ohne Verpackung 60cm                                                | 10 Mal auf Holzboden      | Elektrisch funktionsfähig |
|                             |                                       | Mit Paket 60cm                                                      | 10 Mal auf Holzboden      | Elektrisch funktionsfähig |
|                             | Vibrations Test                       | 50Hz X-Axis 2mm 30 Minuten                                          | Vibrationstisch           | Elektrisch funktionsfähig |
|                             |                                       | 50Hz Y-Axis 2mm 30 Minuten                                          | Vibrationstisch           | Elektrisch funktionsfähig |
|                             |                                       | 50Hz Z-Axis 2mm 30 Minuten                                          | Vibrationstisch           | Elektrisch funktionsfähig |
|                             | Zugfestigkeit des Kabels<br>Krafttest | Gewicht laden 4 kg<br>60 Sekunden<br>Radfahren rein 24 Std          | Zugprüfmaschine           | Elektrisch funktionsfähig |
| Elektrisch                  | ESD-Test                              | Kontaktaufnahme 2 KV                                                | ESD-Prüfmaschine          | Elektrisch funktionsfähig |
|                             |                                       | Luftentladung 4 KV                                                  | ESD-Prüfmaschine          | Elektrisch funktionsfähig |
|                             | Alterungstest                         | On/Off 30 Sekunden<br>Radfahren rein 24 Std                         | Stromschalter             | Elektrisch funktionsfähig |
|                             | USB-Anschluss                         | On/Off 250 Mal                                                      | Einstecken und ausstecken | Elektrisch funktionsfähig |



| Inspektionsgegenstand |              | Untersuchungsmethode     | Inspektionsstandard          |                                                                     |                              |
|-----------------------|--------------|--------------------------|------------------------------|---------------------------------------------------------------------|------------------------------|
| Kategorie             | Artikel      |                          |                              |                                                                     |                              |
| Aussehen              | FPC oder PCB | Farbe                    | Das bloße Auge               | Größere Unterschiede sind nicht zulässig.                           |                              |
|                       |              | Zerrissen/gehackt werden | Das bloße Auge               | Das Freilegen von Kupferrissen ist nicht zulässig.                  |                              |
|                       |              | Markierung               | Das bloße Auge               | Klar, erkennbar (innerhalb von 30 cm Entfernung)                    |                              |
|                       | Halterin     | Kratzer                  | Das bloße Auge               | Die Freilegung von Rissen im Inneren ist nicht zulässig             |                              |
|                       |              | Lücke                    | Das bloße Auge               | Erfüllen Sie den Höhenstandard                                      |                              |
|                       |              | Schraube                 | Das bloße Auge               | Stellen Sie sicher, dass Schrauben vorhanden sind (falls vorhanden) |                              |
|                       |              | Schaden                  | Das bloße Auge               | Die Freilegung von Rissen im Inneren ist nicht zulässig             |                              |
|                       | Linse        | Kratzen                  | Das bloße Auge               | Keine Auswirkung auf den Auflösungsstandard                         |                              |
|                       |              | Kontamination            | Das bloße Auge               | Keine Auswirkung auf den Auflösungsstandard                         |                              |
|                       |              | Ölfilm                   | Das bloße Auge               | Keine Auswirkung auf den Auflösungsstandard                         |                              |
|                       |              | Abdeckband               | Das bloße Auge               | Kein Problem beim Aussehen.                                         |                              |
|                       | Funktion     | Bild                     | Keine Kommunikation          | Testboard                                                           | Nicht erlaubt                |
| Helles Pixel          |              |                          | Tafel                        | Im Image Center nicht erlaubt                                       |                              |
| Dunkles Pixel         |              |                          | Weißer Tafel                 | Im Image Center nicht erlaubt                                       |                              |
| Verschwommen          |              |                          | Das bloße Auge               | Nicht erlaubt                                                       |                              |
| Kein Bild             |              |                          | Das bloße Auge               | Nicht erlaubt                                                       |                              |
| Vertikale Linie       |              |                          | Das bloße Auge               | Nicht erlaubt                                                       |                              |
| Horizontale Linie     |              |                          | Das bloße Auge               | Nicht erlaubt                                                       |                              |
| Kleines Leck          |              |                          | Das bloße Auge               | Nicht erlaubt                                                       |                              |
| Blinkendes Bild       |              |                          | Das bloße Auge               | Nicht erlaubt                                                       |                              |
| Prellung              |              |                          | Inspektionslehre             | Nicht erlaubt                                                       |                              |
| Auflösung             |              |                          | Diagramm                     | Folgt dem Diagrammstandard für ausgehende Inspektionen              |                              |
| Farbe                 |              |                          | Das bloße Auge               | Kein Problem                                                        |                              |
| Lärm                  |              |                          | Das bloße Auge               | Nicht erlaubt                                                       |                              |
| Ecke dunkel           |              |                          | Das bloße Auge               | Weniger als 100 x 100 Pixel                                         |                              |
| Farbauflösung         |              |                          | Das bloße Auge               | Kein Problem                                                        |                              |
| Abmessungen           |              |                          | Höhe                         | Das bloße Auge                                                      | Befolgt Zulassungsdatenblatt |
|                       |              |                          | Breite                       | Das bloße Auge                                                      | Befolgt Zulassungsdatenblatt |
|                       | Länge        | Das bloße Auge           | Befolgt Zulassungsdatenblatt |                                                                     |                              |
|                       | Gesamt       | Das bloße Auge           | Befolgt Zulassungsdatenblatt |                                                                     |                              |

## KLT-Paketlösungen

KLT Kameramodul

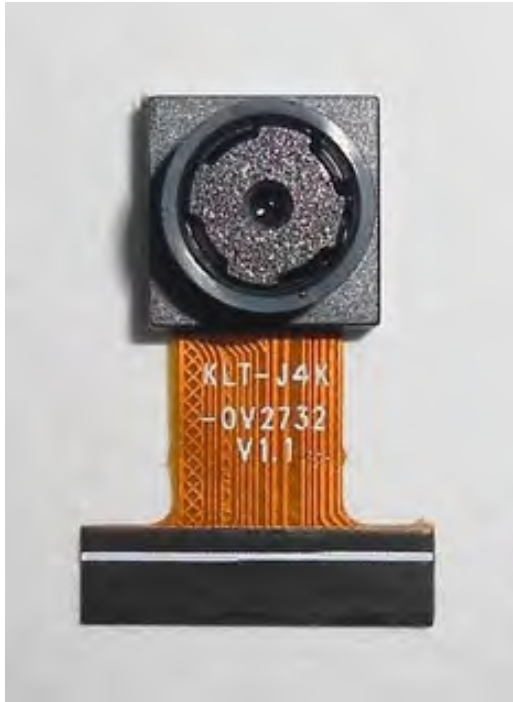

Komplett mit Linsenschutzfolie



Tablett mit Gitter und Raum




Legen Sie die Kameras auf das Tablett



## Paketlösung für Kameramodule

Volles Tablett mit Kameras

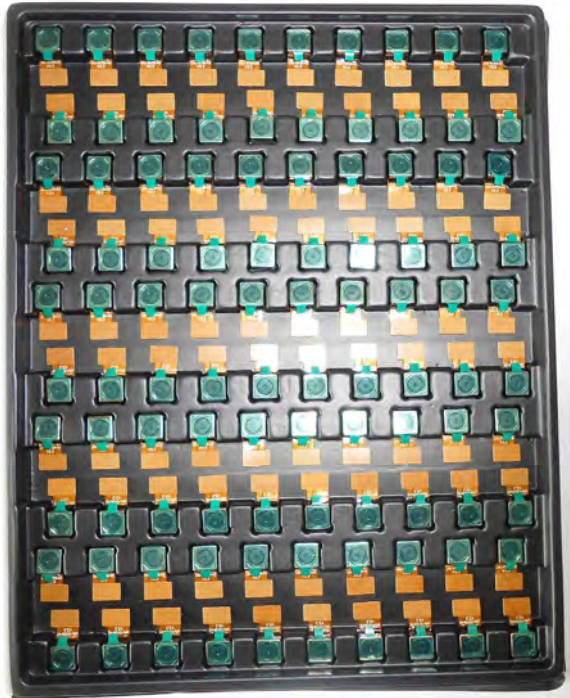


Abdeckschale mit Deckel



In Antistatikbeutel stecken



Staubsaugen Sie den antistatischen Beutel

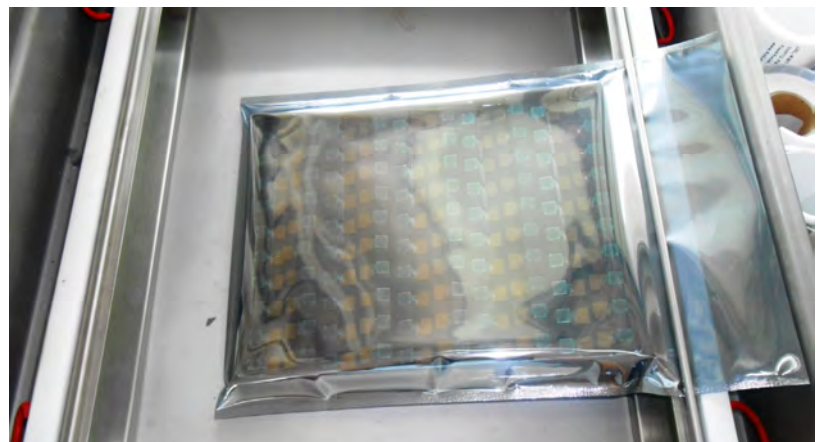

## Paketlösung für Kameramodule

Versiegelter Vakuumbbeutel mit Etiketten

1. Modell und Beschreibung 2. Menge 3. Versanddatum 4. Achtung



## Paketlösung für große Bestellungen

Schaumstoffplatten zwischen  
die Tablettts legen



Schaumstoffplatten sind etwas  
größer als Tablettts



Legen Sie Schaumstoffplatten und  
Tablettts in die Schachtel



Schaumstoffplatten sind eng anliegende Box



## Paketlösung für kleine Bestellungen

Legen Sie die Schaumstoffplatten und  
Tablets in die kleine Schachtel



Schaumstoffplatten passen gut in  
die kleine Box



Paket in kleiner Box für den Versand



Legen Sie kleine Kartons in größere Kartons



## Carbon Box Paketlösung

Verschließen Sie die Carbonbox

Beschriftete Schachtel mit Endverpackung



### Versandfertige Karbonbox

1. Lieferadresse und Telefonnummer
2. Box-Nr. und Versanddatum
3. Zerbrechliche Vorsicht



## Lösung für Musterbestellungspakete

Legen Sie die Probe in einen kleinen antistatischen Beutel



Stecken Sie die Anschlüsse in den kleinen antistatischen Beutel



### Musteretiketten auf dem kleinen Beutel

1. Kameramodul oder Anschlussmodell 2. Lieferdatum und Menge 3. Achtung



## Steckverbinder Paketlösung für große Bestellungen

Steckverbinder in einem Rad



Steckverbinder im Rad beschriften



Das Rad passt perfekt in die Box



Steckerbox versandfertig




**Unternehmen Kai Lap Technologies (KLT)**

Kai Lap Technologies Group Limited. (KLT) wurde 2009 gegründet und ist ein technologiegetriebener Hersteller der nächsten Generation, der sich auf Forschung, Design und Produktion von Audio- und Videoprodukten spezialisiert hat. KLT verfügt über 20.000 Quadratfuß automatisierte Fabriken mit 100 Mitarbeitern und einem jährlichen Durchsatz von 30.000.000 Kameraeinheiten.

KLT bietet OEM-, ODM-Design, Auftragsfertigung und baut die Kameraprodukte. Sie können uns die Anforderungen auch mit einem Handentwurf übermitteln, unser Vertrieb und unsere Technik arbeiten zusammen, um Ihre Anforderungen zu erfüllen. Wir verstehen uns als Ihr langfristiger Partner bei der Entwicklung praktischer und innovativer Lösungen.

Unser Team deckt alles von der ersten Konzeptentwicklung bis zum Massenprodukt ab. KLT ist spezialisiert auf kundenspezifisches Kameradesign, Rohmaterial, Elektrotechnik, Firmware-/Softwareentwicklung, Produkttests und Verpackungsdesign. Unsere erfahrenen strategischen Versorgungssysteme bieten eine robuste und zuverlässige Fertigungskapazität für Aufträge unterschiedlicher Größe.

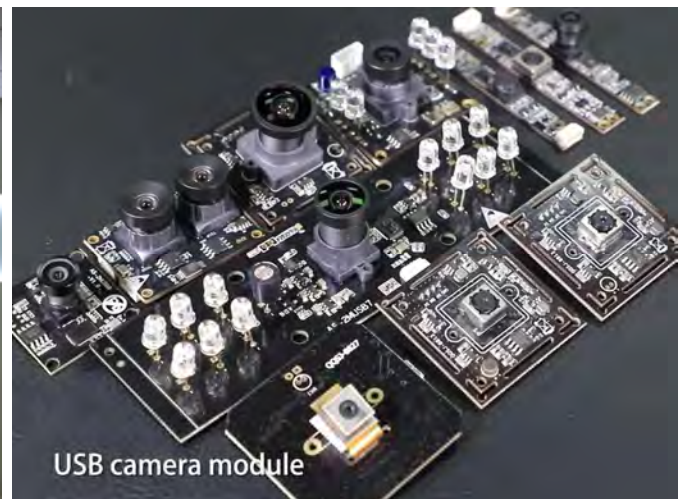**Eingeschränkte Garantie**

KLT gewährt die folgende eingeschränkte Garantie, wenn Sie das/die Produkt(e) direkt von der Firma KLT oder von der Website von KLT, [www.KaiLapTech.com](http://www.KaiLapTech.com), gekauft haben. Produkte, die von anderen Verkäufern oder Quellen gekauft wurden, fallen nicht unter diese beschränkte Garantie. KLT garantiert, dass das/die Produkt(e) bei normalem Gebrauch für einen Zeitraum von einem (1) Jahr ab dem Datum, an dem Sie das Produkt erhalten („Garanzzeitraum“), frei von Material- und Verarbeitungsfehlern sind.

Für alle Produkte, die während des Garanzzeitraums Material- oder Verarbeitungsfehler enthalten oder entwickeln, wird KLT nach eigenem Ermessen entweder: (i) die Produkte reparieren; (ii) das/die Produkt(e) durch ein neues oder generalüberholtes Produkt(e) ersetzen (Ersatzprodukt(e) sind von identischem Modell oder funktionell gleichwertig); oder (iii) Ihnen den Preis erstatten, den Sie für das/die Produkt(e) gezahlt haben.

Diese eingeschränkte Garantie von KLT ist ausschließlich auf Reparatur und/oder Ersatz zu den oben genannten Bedingungen beschränkt. KLT ist nicht zuverlässig oder verantwortlich für nachfolgende Ereignisse.



## KLT Stärke

### Leistungsstarke Fabrik



## Professioneller Service



## Versprochene Lieferung

