

KLT-L9MF-OV13855 V1.0

**OmniVision OV13855 MIPI Interfaccia Messa a fuoco fissa 13MP M12
Modulo telecamera**




Modulo telecamera n.	KLT-L9MF-OV13855 V1.0
Sensore d'immagine	OV13855
EFL	2.27 mm
F.NO	2.4
Pixel	4224 x 3136
Vista ad angolo	152°(D) 122°(H) 93°(V)
Tipo di lente	1/3.06 pollice
Dimensioni dell'obiettivo	13.00 x 13.00 x 21.62 mm
Dimensione del modulo	40.00 x 22.00 mm
Tipo di modulo	Messa a fuoco fissa
Interfaccia	MIPI

Connettore di accoppiamento Codice. DF30FC-30DS-0.4V



Connettore di accoppiamento sulla scheda principale. Venduto separatamente.



OV13855 13MP product brief



13-Megapixel PureCel® Plus Sensor Brings High-End Imaging Capabilities to Mainstream Smartphones



available in
a lead-free
package

OmniVision's high performance OV13855 is a 13-megapixel PureCel® Plus image sensor designed to bring high-quality imaging to rear-facing camera applications in mainstream smartphones. It is also well-suited for front-facing and dual camera applications in high-end mobile devices. In addition to best-in-class pixel performance, this 3rd generation 13-megapixel sensor also offers advanced features such as the phase detection autofocus (PDAF).

Built on OmniVision's PureCel® Plus pixel technology, the OV13855 delivers significant improvements in low-light performance, color crosstalk reduction, and angular response, when compared with previous-generation 13-megapixel sensors. The OV13855 captures full-

resolution 13-megapixel still images at 30 frames per second (fps) and records ultra-high resolution 4K2K video at 30 fps, 1080p full high definition (HD) at 60 fps, or 720p HD at 120 fps.

The OV13855 fits in 8.5 x 8.5 mm autofocus modules with z-heights of less than 5 mm for rear cameras, and 7.5 x 7.5 mm fixed focus modules with z-heights of less than 4.5 mm for high-end front-facing cameras. The sensor is available in non-PDAF (OV13858) and monochrome (OV13355) versions for front-facing and dual camera applications.

Find out more at www.ovt.com.




Applications

- Smartphones and Feature Phones
- Tablets
- PC Multimedia
- Wearables

Product Features

- 1.12 μm x 1.12 μm pixel
- optical size of 1/3.06"
- 33.15° CRA
- support for PDAF
- 13MP at 30 fps
- programmable controls for frame rate, mirror and flip, cropping, and windowing
- supports images sizes: 13MP (4224x3136), 10MP (4224x2376), 3MP (2112x1568), 1080p (1920x1080), 720p (1280x720), and more
- 3.3k bits of embedded one-time programmable (OTP) memory for customer use
- support for output formats: 10-bit RGB RAW
- interlaced row HDR output
- two-wire serial bus control (SCCB)
- MIPI serial output interface (1-, 2-lane, or 4-lane)
- two on-chip phase lock loops (PLLs)
- 2x binning support
- image quality controls: defect pixel correction, automatic black level calibration, and lens shading correction
- built-in temperature sensor
- suitable for module size of 8.5 x 8.5 x 5 mm

OV13855




Ordering Information

- OV13855-GA5A-Z (color, chip probing, 150 μm backgrinding, reconstructed wafer)

Product Specifications

- active array size: 4256 x 3168
- power supply:
 - core: 1.14 - 1.26V (1.2V nominal)
 - analog: 2.7 - 3.0V (2.8V nominal)
 - I/O: 1.7 - 1.9V (1.8V nominal)
- power requirements:
 - active: 233 mW (based on ISP ON)
 - standby: 1 mW
 - XSHUTDOWN: $10\ \mu\text{A}$
- temperature range:
 - operating: -30°C to +85°C junction temperature
 - stable image: 0°C to +60°C junction temperature
- output interfaces: 4-lane MIPI serial output
- output formats: 10-bit RGB RAW
- lens size: 1/3.06"
- lens chief ray angle: 33.15° non-linear
- input clock frequency: 6 - 27 MHz
- maximum image transfer rate:
 - 13MP (4224x3136): 30 fps
 - 10MP (4224x2376): 30 fps
 - 3MP (2112x1568): 60 fps
 - 1080p (1920x1080): 60 fps
 - 720p (1280x720): 120 fps
- minimum exposure: 4-row
- maximum exposure: VTS-8
- pixel size: 1.12 μm x 1.12 μm
- image area: 4749.696 μm x 3535.488 μm
- die dimensions:
 - COB: 5868 μm x 4950 μm
 - RW: 5918 μm x 5000 μm

Functional Block Diagram

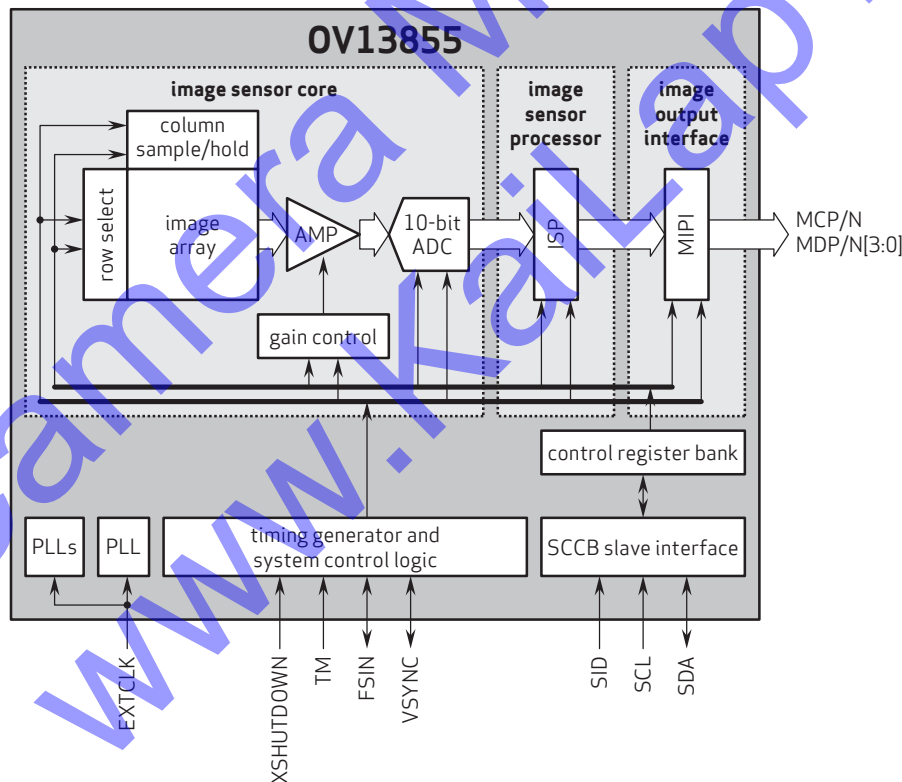

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: + 1 408 567 3000
Fax: + 1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo, VarioPixel and PureCel are registered trademarks of OmniVision Technologies, Inc. OmniBSI is a trademark of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision