


## KLT-USB1A-FF-OV9734 V1.0

OmniVision OV9734 USB インターフェース 固定焦点 1MP カメラモジュール



カメラモジュール番号	<b>KLT-USB1A-FF-OV9734 V1.0</b>
イメージセンサー	OV9734
<b>EFL</b>	1.25 mm
<b>F.NO</b>	4.0
ピクセル	1280 x 720
視野角	120°
レンズタイプ	1/9 インチ
レンズ寸法	2.10 mm Diameter
モジュールサイズ	3.3 mm Diameter x 19.10 mm
モジュールのタイプ	固定焦点
インターフェース	USB

<p>嵌合USBケーブル部品番号: <b>KLT-USB1A-Cable</b></p> 
<p>USBケーブル延長コード。別売りされている。</p>

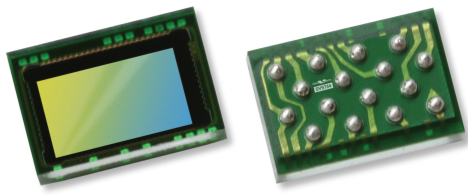

# OV9734 720p HD product brief



## OmniVision's Smallest 720p High Definition Sensor for Next-Generation Notebooks and Mobile Devices



available in a lead-free package

The OV9734 is an ultra-compact and power efficient CameraChip™ image sensor designed for slim notebooks, tablets, handsets, and other devices that require a thin bezel. Built on OmniVision's PureCel™ technology, the OV9734 CameraChip™ delivers premium quality images and video, while consuming significantly less power than previous generation image sensors.

OmniVision's 1/9-inch OV9734 is capable of capturing crisp 720p HD video at 30 frames per second (fps) or VGA video at 45 fps, while consuming approximately

25 percent less power than the previous generation 720p sensor. Additionally, the OV9734 meets the video quality specifications for popular video conferencing platforms.

To fit ultra-thin bezel devices, the OV9734 comes in a compact package that can meet 2.5 mm z-height and is 47 percent smaller in y-dimension compared to the previous generation 720p sensor.

Find out more at [www.ovt.com](http://www.ovt.com).




## Applications

- Smart phones
- PC multimedia
- Tablets
- Digital Still Cameras
- Toys

## Product Features

- support for image sizes: full size (1280x720), VGA (640x480), 2x2 RGB binning (640x360) and 2x2 BW binning (640x360)
- support for horizontal and vertical sub-sampling
- automatic black level calibration (ABLC)
- defect pixel correction (DPC)
- support for black sun cancellation
- standard SCCB interface
- GPIO tri-state configurability and programmable polarity
- support for output formats: RAW output with MIPI
- on-chip phase lock loop (PLL)
- capable of maintaining register values at software power down
- programmable controls for frame rate, mirror and flip, gain/exposure, and windowing

# OV9734




## Ordering Information

- OV9734-H16A  
(color, lead-free, 16-pin CSP5)

## Product Specifications

- active array size: 1280 x 720
- input clock frequency: 6 - 27 MHz
- max S/N ratio: TBD
- dynamic range: TBD
- maximum image transfer rate: 30 fps
- sensitivity: TBD
- scan mode: progressive
- maximum exposure interval: 798 x t<sub>row</sub>
- pixel size: 1.4 μm x 1.4 μm
- dark current: TBD
- image area: 1819.58 μm x 1033.34 μm
- package dimensions: 2532 μm x 1722 μm
- power supply:
  - core: 1.2VDC ±5%
  - analog: 2.6 - 3.0V (2.8V normal)
  - I/O: 1.8V
- power requirements:
  - I<sub>DD-A</sub>: TBD
  - I<sub>DD-IO</sub>: TBD
  - I<sub>DD-P</sub>: TBD
  - XSHUTDOWN: TBD
- temperature range:
  - operating: -30°C to +85°C junction temperature
  - stable image: 0°C to +50°C junction temperature
- output formats: RAW RGB
- lens size: 1/9"
- lens chief ray angle: 32.1°

## Functional Block Diagram

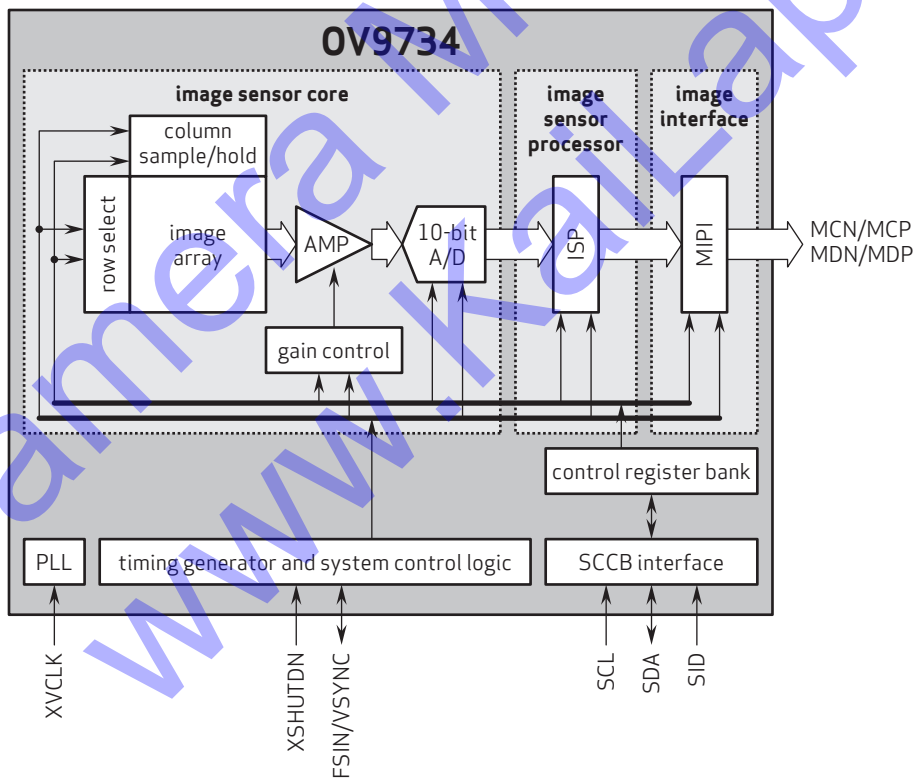

4275 Burton Drive  
Santa Clara, CA 95054  
USA

Tel: +1 408 567 3000  
Fax: +1 408 567 3001  
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision is a registered trademark of OmniVision Technologies, Inc. The OmniVision logo and PureCel are trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision