

## JAL-KC4-BC802A

OmniVision OV2655 MIPI Interface Foco Fixo 2MP Módulo de Câmera




<b>Módulo de câmara No.</b>	<b>JAL-KC4-BC802A</b>
<b>Sensor de imagem</b>	OV2655
<b>EFL</b>	2.9 mm
<b>F.NO</b>	2.5
<b>Pixel</b>	1600 x 1200 (UXGA)
<b>Ângulo de visão</b>	57°
<b>Tipo de lente</b>	1/5 polegada
<b>Dimensões da lente</b>	6.5 x 6.5 x 4.1 mm
<b>Tamanho do Módulo</b>	20 x 6.5 mm
<b>Tipo de Módulo</b>	Foco Fixo
<b>Interface</b>	MIPI
<b>Modelo de lente IMT</b>	IMT-3A5E001-6

**Acasalamento Parte conector No. 24-5804-024-000-829**



Conector de acoplamento na placa principal. Vendido separadamente.



# OV2655 2-megapixel product brief



## High Sensitivity 1/5-inch 2-megapixel CameraChip™ Sensor

The OV2655 is a single-chip, high-performance 2-megapixel CMOS CameraChip sensor with a 1/5-inch optical format. The OV2655 is based on OmniVision's 1.75 micron OmniPixel3-HS™ architecture which uses Ultra Low Stack Height (ULSH) pixels to achieve industry-leading low-light sensitivity of 1030 mV/(Lux-sec), which is vital for high frame rate video applications. The small form factor of the OV2655 also makes it possible for it to fit in a 6.5 x 6.5 mm camera module.

The OV2655 operates at up to 15 frames per second (fps) in full resolution and 30 fps in SVGA mode. The captured data can be transferred either by a standard parallel digital video port (DVP) or by a single-lane MIPI

high-speed serial interface. The DVP can also be used for input from an external secondary camera, enabling the advanced ISP of the OV2655 to be used by the secondary camera with continued output through the MIPI interface.

Despite its small form factor, the OV2655 has an advanced image signal processor embedded with all functions required by a high-performance camera.

For identification purposes, the OV2655 includes one-time programmable (OTP) memory.

Find out more at [www.ovt.com](http://www.ovt.com).



# OV2655

## Applications

- Mobile Phones
- Entertainment
- Digital Still Cameras

## ordering information

- **OV2655-V38A**  
(color, lead-free, 38-pin CSP2)
- **OV2655-G00A**  
(color, chip probing, no backgrinding)


## Product Features

- industry leading low-light sensitivity of 1030 mV/(Lux-sec)
- ultra low power and low cost
- automatic image control functions:
  - automatic exposure control (AEC)
  - automatic white balance (AWB)
  - automatic 50/60 Hz luminance detection
  - automatic black level calibration (ABLC)
- support for output formats: RAW, RGB, RGB565/555, YUV422/420, and YCbCr422
- programmable controls for frame rate, AEC/AGC 16-zone size/position/weight control, mirror and flip, scaling, cropping, and windowing
- image quality controls: color saturation, hue, gamma, sharpness (edge enhancement), lens correction, defective pixel canceling, and noise canceling
- support for:
  - video or snapshot operations
  - auto focus control (AFC)
  - horizontal/vertical sub-sampling
  - internal and external frame synchronization
  - LED and flash strobe mode
- second CameraChip-sharing ISP and MIPI interface
- standard serial SCCB interface
- digital video port (DVP) parallel output interface
- MIPI serial output interface
- embedded one-time programmable (OTP) memory

## Product Specifications

- **array size:** 1600 x 1200
- **power supply:**
  - core: 1.5VDC + 5%
  - analog: 2.45 - 3.0V
  - I/O: 1.7 - 3.0V
- **power requirements:**
  - active: 250 mW
  - standby: 75  $\mu$ A
- **temperature range:**
  - operating: -20° C to 70° C
  - stable image: 0° C to 50° C
- **output format (8-bit):**
  - YUV(422/420)
  - YCbCr422
  - RGB565/555
  - 8-/10-bit raw RGB data
- **lens size:** 1/5"
- **chief ray angle:** 25° non-linear
- **input clock frequency:** 6 - 27 MHz
- **max image transfer rate:**
  - UXGA (1600 x 1200): 15 fps (and any size scaling down from UXGA)
  - SVGA (800 x 600): 30 fps (and any size scaling down from SVGA)
- **S/N ratio:** 37 dB
- **dynamic range:** 66 dB
- **sensitivity:** 1030 mV/(Lux-sec)
- **maximum exposure interval:** 1235 x t<sub>ROW</sub>
- **pixel size:** 1.75  $\mu$ m x 1.75  $\mu$ m
- **image area:** 2842  $\mu$ m x 2121  $\mu$ m
- **package/die dimensions:**
  - CSP2: 4835  $\mu$ m x 4895  $\mu$ m
  - COB: 4850  $\mu$ m x 4910  $\mu$ m

## Functional Block Diagram

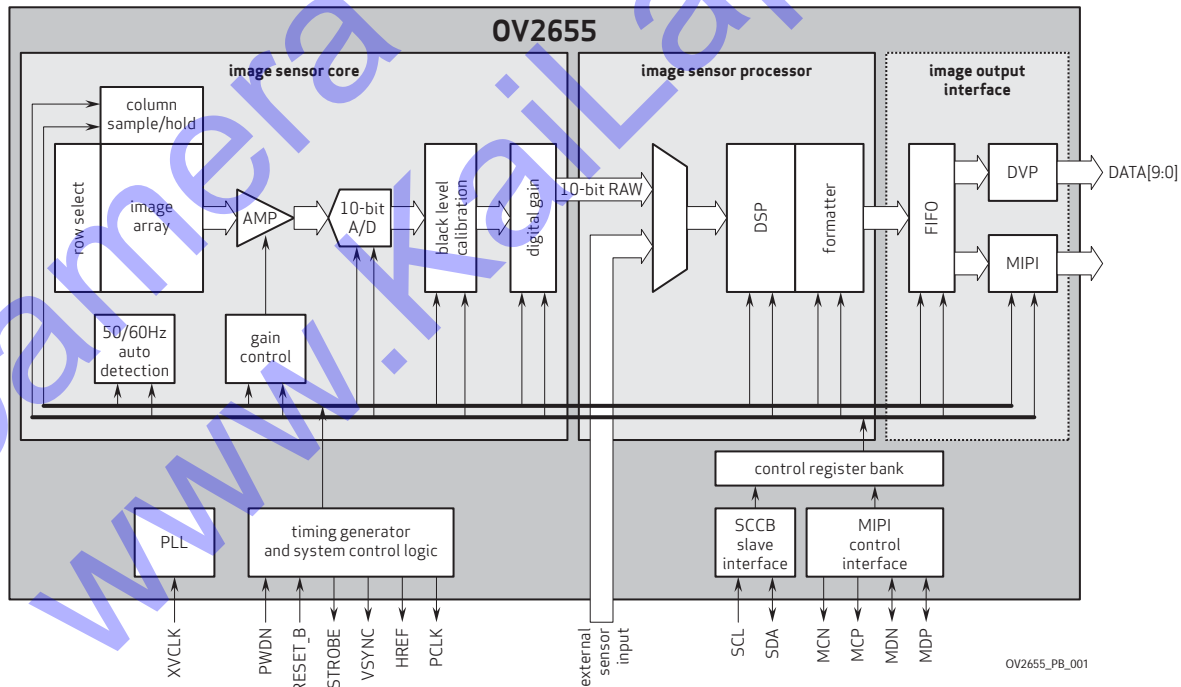

4275 Burton Drive  
Santa Clara, CA 95054

tel: +1 408 567 3000  
fax: +1 408 567 3001  
[www.ovt.com](http://www.ovt.com)

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and OmniPixel are registered trademarks of OmniVision Technologies, Inc. CameraChip and OmniPixel3-HS are trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.

