

## KLT-K3MF-OV9714 V1.1

**OmniVision OV9714 MIPI Интерфейс Фиксированный фокус 1MP  
Модуль камеры**




<b>№ модуля камеры</b>	<b>KLT-K3MF-OV9714 V1.1</b>
<b>Датчик изображений</b>	OV9714
<b>EFL</b>	3.29 mm
<b>F.NO</b>	2.8
<b>Пиксель</b>	1296 x 812
<b>Угол обзора</b>	68.7°
<b>Тип линзы</b>	1/4 дюйм
<b>Размеры линз</b>	8.00 x 8.00 x 4.92 mm
<b>Размер модуля</b>	66.00 x 11.00 mm
<b>Тип модуля</b>	Фиксированный фокус
<b>Интерфейс</b>	MIPI

**Ответный соединитель Деталь No. AXE540124**



Ответный разъем на основной плате. Продано отдельно.

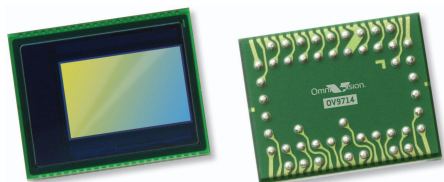

# OV9714 720p product brief



## Native High Definition OV9714 CameraChip™ With Improved Dynamic Range and 720p/60 Video



available in  
a lead-free  
package

The 1/4-inch OV9714 is a native high-definition (HD) image sensor capable of capturing high quality 720p video at 60 frames per second (fps) or cropped VGA at 120 fps. Built on an enhanced OmniPixel3-HS™ pixel, the OV9714 combines excellent low-light performance of 3300 mV/lux-sec and high dynamic range (HDR) with fast frame rates, making it ideally suited for entertainment, notebook, telepresence and high-end security applications.

The sensor's new and improved OmniPixel3-HS pixel architecture offers better low-light sensitivity, signal to noise ratio (SNR) performance and a 5 dB improvement in dynamic range compared to the previous generation. The OV9714's 12-bit RGB RAW output capability

provides optimized HDR, while the embedded sequential line- or frame-based HDR features allow higher dynamic range for high-contrast scenes often encountered indoors.

The OV9714's fast frame rate minimizes latency delay, resulting in quick response time for interactive gaming and real-time communication applications. Additionally, the sensor offers frame synchronization functionality for use in 3D (stereo) camera systems.

The sensor comes with a standard 2-lane MIPI interface and fits into an 8 x 6 x 4.5 mm module size.

Find out more at [www.ovt.com](http://www.ovt.com).


## Applications

- PC Multimedia
- Entertainment
- Tablets
- Cellular and Mobile Phones
- Security
- Games

## Product Features

- automatic black level calibration (ABLC)
- support 2x2 binning
- programmable controls for frame rate, mirror and flip, cropping and windowing
- standard serial SCCB interface
- image quality controls: lens correction and defective pixel canceling
- two-lane MIPI/LVDS serial output interface
- supports output formats: 8/10/12-bit RAW RGB (MIPI/LVDS)
- embedded 256 bits one-time programmable (OTP) memory for part identification, etc.
- supports horizontal and vertical sub-sampling
- on-chip phase lock loop (PLL)
- supports images sizes: 1280x800, 640x400, 320x200, and 160x100
- programmable I/O drive capability
- fast mode switching
- support alternate frame HDR/line HDR

# OV9714




## Ordering Information

- OV9714-A49A (color, lead-free, 49-pin CSP3)

## Product Specifications

- active array size: 1296 x 812
- max S/N ratio: 39 dB
- power supply:
  - core: 1.5 VDC ±5%
  - analog: 2.6 - 3.0V
  - I/O: 1.7 - 3.0V
- dynamic range: 73 dB @ 8x gain
- power requirements:
  - active: 95 mA
  - standby: 30 µA
  - xshutdown: 5 µA
- maximum image transfer rate:
  - 1280x800: 60 fps
  - 640x400: 120 fps
  - 320x200: 240 fps
- sensitivity: 3300 mV/lux-sec
- scan mode: progressive
- temperature range:
  - operating: -30°C to 85°C junction temperature
  - stable image: 0°C to 50°C junction temperature
- maximum exposure interval: 800 x t<sub>row</sub>
- output formats: 12-bit RGB RAW
- pixel size: 3.0 µm x 3.0 µm
- lens size: 1/4"
- dark current: 2.3 mV/s @ 50°C junction temperature
- lens chief ray angle: 28.7° non-linear
- image area: 3936 µm x 2460 µm
- input clock frequency: 6 - 27 MHz
- package dimensions: 6110 µm x 4930 µm

## Functional Block Diagram

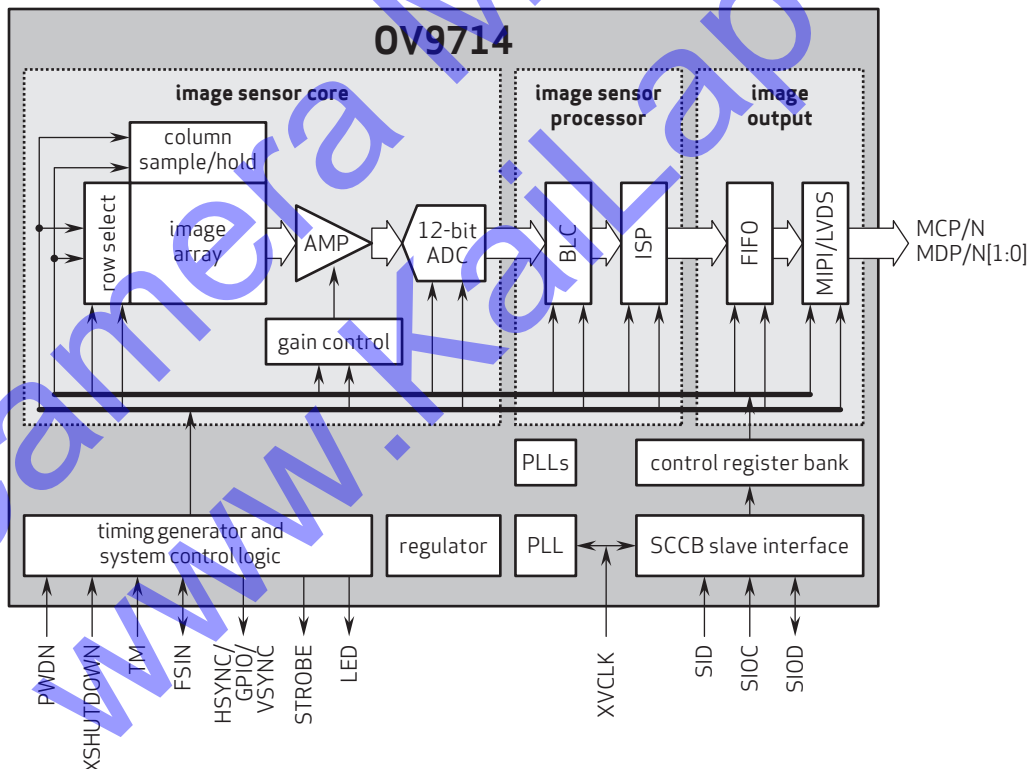

4275 Burton Drive  
Santa Clara, CA 95054  
USA

Tel: + 1 408 567 3000  
Fax: + 1 408 567 3001  
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and OmniPixel are registered trademarks of OmniVision Technologies, Inc. OmniBSI-2 is a trademark of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.

OmniVision