



KLT-IRSW-OS05A20 V3.0

OmniVision OS05A20 带红外开关 MIPI串行接口 固定焦距 500万像素 M12 摄像头模组



摄像头模组型号	KLT-IRSW-OS05A20 V3.0	
图像感光芯片	OS05A20	红外开关
焦距	1.95 mm	输入电压: 3.3V ~ 5.5V
光圈	2.2	红外线: 645nm +/- 15nm
像素	2688 x 1944	AR: 700nm ~ 1000 nm
可视角度	180°(D) 171.5°(H) 118°(V)	运行 (IR白天时间)
镜头类型	1/2.7 英寸	红线: 负
镜头尺寸	22.20 x 21.50 x 12.96 mm	黑线: 正
模组尺寸	50.00 x 30.00 mm	操作 (AR 夜间)
模组类型	固定焦距	红线: 正
接口	MIPI串行	黑线: 负

配对连接器型号: **WP7A-S024VA1**



主板上的对应连接器。分开售卖。



OS05A20 5-megapixel product brief



New OS05A20 Uses Nyxel™ Technology to Bring Superior Image Quality to Video Surveillance Cameras Day or Night

lead free
available in
a lead-free
package

The 5-megapixel OS05A20 is the world's first image sensor to implement Nyxel™ technology, OmniVision's breakthrough near-infrared (NIR) technology that allows image sensors to see better and farther under low- and no-light conditions. By using Nyxel technology and a 2 x 2 micron pixel, the OS05A20 PureCel® image sensor has the unique ability to capture high-quality, high-resolution day or night, making it ideally suited for professional surveillance systems.

Nyxel technology combines thick-silicon pixel architectures with extended deep trench isolation (DTI) to improve quantum efficiency (QE) up to 3x for 850 nm sensitivity and up to 5x for 940 nm sensitivity, while

maintaining all other image-quality metrics. These improvements deliver unrivaled image quality, extended image-detection range and a reduced light-source requirement, leading to lower power consumption.

Available in a 1/2.7-inch optical format, the OS05A20 is capable of capturing full-resolution 2688 x 1944 video at 60 frames per second (fps), 1080p full high definition (HD) video at 120 fps, and 720p HD video at 180 fps. The sensor comes in a 6.6 x 5.9 mm chip scale package (CSP).

Find out more at www.ovt.com.



Applications

- Security Cameras
- High Resolution Consumer Cameras
- Action Cameras

Product Features

- 2 μm x 2 μm pixel
- optical size of 1/2.7"
- programmable controls for:
 - frame rate
 - mirror and flip
 - cropping
 - windowing
- supports output formats:
 - 10/12-bit RGB RAW
- supports images sizes:
 - 5MP (2688x1944)
 - 1080p (1920x1080)
 - 720p (1280x720)
- supports 2x2 binning
- standard serial SCCB interface
- 12/10-bit ADC
- up to 4-lane MIPI/LVDS serial output interface (supports maximum speed up to 1500 Mbps/lane)
- 2-exposure staggered HDR support
- programmable I/O drive capability
- light sensing mode (LSM)
- PLL with SCC support
- support for frame sync

OS05A20




Ordering Information

- OS05A20-H73A-Z
(color, lead-free, 73-pin CSP)

Product Specifications

- active array size: 2688 x 1944
- lens chief ray angle: 11° linear
- max S/N ratio: 39 dB
- dynamic range: 74 dB @ 16x gain
- maximum image transfer rate:
 - 2688x1944: 60 fps
 - 2688x1520: 60 fps
- sensitivity: 13,000 e⁻/Lux-sec
- scan mode: progressive
- maximum exposure interval: VTS - 8
- minimum exposure interval: 4 t_{row}
- pixel size: 2.0 μm x 2.0 μm
- image area: 5434.56 μm x 3948.05 μm
- package dimensions: 6638.8 μm x 5935 μm
- power supply:
 - core: 1.2V
 - analog: 2.8V
 - I/O: 1.8V
- power requirements:
 - active: 170 mW
 - standby: 900 μA
 - XSHUTDOWN: 80 μA
- temperature range:
 - operating: -30°C to +85°C junction temperature
 - stable image: 0°C to +60°C junction temperature
- output formats: 10/12-bit RGB RAW
- lens size: 1/2.7"
- input clock frequency: 6 - 27 MHz

Functional Block Diagram

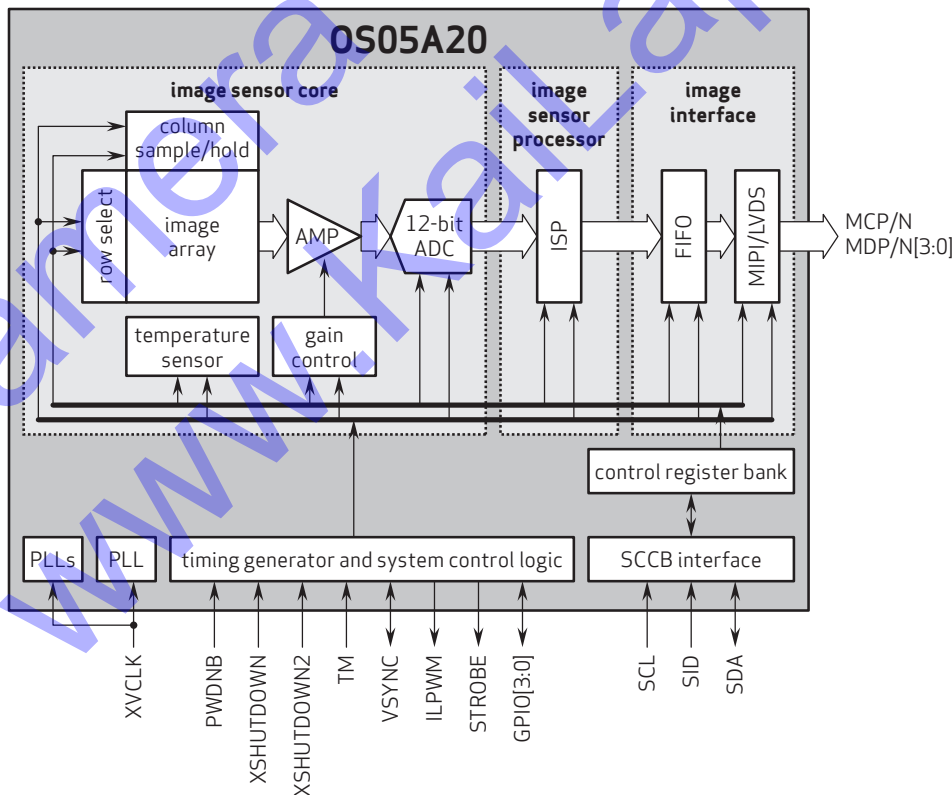

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: + 1 408 567 3000
Fax: + 1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and PureCel are registered trademarks of OmniVision Technologies, Inc. Nixel is a trademark of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision